


# PRE-CLEANER DELTA 142.1



The Delta 142.1 Pre-cleaner is designed for ideal usage of the screen area in conjunction with a sophisticated aspiration system. The screen cleaning effect of the total screen area is increased by Cimbria's highly effective pre-suction and after-suction system.

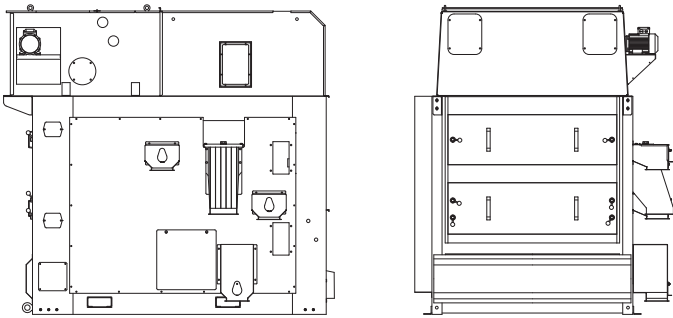

## PERFORMANCE

Materials	Bulk density t/m <sup>3</sup>	Moisture content %	Capacity t/h
Barley	0.68	20 (15)	30 (18)
Coffee, green	0.65	20 (15)	12–18 (12)
Maize	0.71	20 (15)	24 (10)
Malt	0.52	20 (15)	10 (10)
Oats	0.51	20 (15)	18 (2)
Peas, common	0.7	20 (15)	24 (5–15)
Rapeseed	0.74	20 (7–9)	25 (12)
Rice, paddy	0.51	20 (15)	12–18 (3)
Rice, white	0.75	20 (15)	24
Rye	0.69	20 (15)	30 (18)
Sorghum	0.64	20 (15)	30 (18)
Soybeans	0.72	20 (15)	24 (5–15)
Sunflower	0.4	14 (7–9)	12 (10)
Wheat	0.76	20/15 (15)	30/35 (18)

Legend: Values in parentheses are for industrial cleaning. Other values are for pre cleaning.

Note: Capacities may vary for different impurity and moisture contents.

## SCREENS

Screen angle	12°
Screen area, total	5 m <sup>2</sup>
Screen size	1 250×800 mm (5 pcs)

## DIMENSIONS

Overall length	2 449 mm
Overall height	2 271 mm
Overall width	1 925 mm

## WEIGHT

Weight, empty	1 800 kg
Weight, running	1 840 kg
Weight, choked	3 350 kg

## OPERATING SPEED

Shaker feeder (shaft)	140–700 rpm
Screens (shaft)	300 rpm

## ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	1.5 kW

## AIR SUPPLY AND EXTRACTION

Aspiration volume	6 400 m <sup>3</sup> /h
-------------------	-------------------------

## DYNAMIC LOADS

Horizontal load "Ph"	±2 621 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±3 171 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±1 657 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

## NOISE

Sound pressure level, empty	73.4 dB(A)
-----------------------------	------------

## COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

\* Consult your Cimbria dealer for full details.

## ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

## SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

## LIFETIME

Intended life limit	20 years
---------------------	----------